

Stainless Steel Enclosures

EX-EC/S SERIES GENERAL PURPOSE WALL MOUNT

General Purpose Wall Mount Enclosures




The EC general purpose wall mount in stainless steel is the 'staple' industrial product in our range. A high quality enclosure built for harsh industrial applications.

Features

- IP66
- 316 stainless steel
- Body construction 1.2/1.5mm
- Concealed stainless steel hinges
- Fully welded construction
- Polyurethane gasket
- 8mm stainless steel square drive spanner lock
- Mounting pan 2mm powder coated white mild steel
- Blind nutsert fasteners
- Stainless steel mounting brackets
- Earth strap kit


GENERAL PURPOSE WALL MOUNT ENCLOSURE	Dimensions (mm)			No. of Locks	Useable Depth	Weight (kg)	Stock Code
	Model No.	Height	Width				
EX-EC202015/S	200	200	150	1	132	1.8	S
EX-EC302015/S	300	200	150	1	132	2.5	S
EX-EC303015/S	300	300	150	1	132	1.8	S
EX-EC403015/S	400	300	150	1	132	4.5	S
EX-EC403020/S	400	300	200	1	182	4.9	S
EX-EC404020/S	400	400	200	1	182	6.2	S
EX-EC406020/S	400	600	200	1	182	8.8	S
EX-EC504020/S	500	400	200	1	182	7.5	S
EX-EC505020/S	500	500	200	1	182	9.0	S
EX-EC604020/S	600	400	200	2	182	8.8	S
EX-EC604030/S	600	400	300	2	282	9.9	S
EX-EC606020/S	600	600	200	2	182	12.4	S
EX-EC606030/S	600	600	300	2	282	13.8	S
EX-EC806020/S	800	600	200	2	182	16.1	S
EX-EC806030/S	800	600	300	2	282	17.6	S
EX-EC106030/S	1000	600	300	2	282	21.5	S
EX-EC108030/S	1000	800	300	2	282	23.5	S
EX-EC126030/S	1200	600	300	2	282	25.4	S
EX-EC128040/S	1200	800	400	2	382	31.5	S



Technical Specifications

Stainless Steel Dimensions And Technical Drawings

EX-EC/S Series

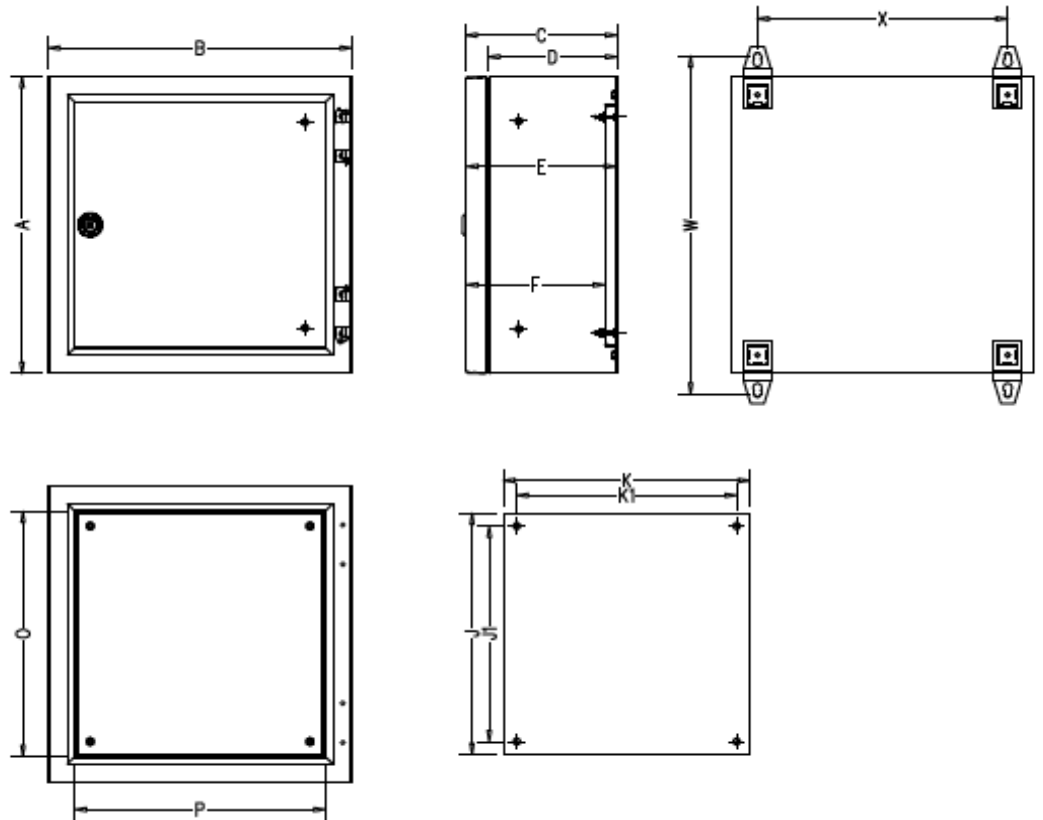

Part No.	External Dimensions				Internal Dimensions		Mounting Pan				Opening Size		Fixing Centres		No. of Locks
	A	B	C	D	E	F	J	K	J1	K1	O	P	W	X	
EX-EC202015/S	200	200	150	120	147	132	125	125	90	90	130	130	255	130	1
EX-EC302015/S	300	200	150	120	147	132	225	125	190	90	230	130	355	130	1
EX-EC303015/S	300	300	150	120	147	132	225	225	190	190	230	230	355	230	1
EX-EC403015/S	400	300	150	120	147	132	325	225	290	190	330	230	455	230	1
EX-EC403020/S	400	300	200	170	197	182	325	225	290	190	330	230	455	230	1
EX-EC404020/S	400	400	200	170	197	182	325	325	290	290	330	330	455	330	1
EX-EC406020/S	400	600	200	170	197	182	325	525	290	490	330	530	455	530	1
EX-EC504020/S	500	400	200	170	197	182	425	325	390	290	430	330	555	330	1
EX-EC505020/S	500	500	200	170	197	182	425	425	390	390	430	430	555	430	1
EX-EC604020/S	600	400	200	170	197	182	525	325	490	290	530	330	655	330	2
EX-EC604030/S	600	400	300	270	297	282	525	325	490	290	530	330	655	330	2
EX-EC606020/S	600	600	200	170	197	182	525	525	490	490	530	530	655	530	2
EX-EC606030/S	600	600	300	270	297	282	525	525	490	490	530	530	655	530	2
EX-EC806020/S	800	600	200	170	197	182	725	525	690	490	730	530	855	530	2
EX-EC806030/S	800	600	300	270	297	282	725	525	690	490	730	530	855	530	2
EX-EC1006030/S	1000	600	300	270	297	282	925	525	890	490	930	530	1055	530	2
EX-EC1206030/S	1200	600	300	270	297	282	1125	525	1090	490	1130	530	1255	530	3