



Mild Steel Enclosures

EX-GPDD SERIES MILD STEEL GENERAL PURPOSE WALL MOUNT – DOUBLE DOOR

Mild Steel General Purpose Wall Mount – Double Door




The double door general purpose powder coated mild steel enclosure is the ideal housing for all control circuitry. Designed to withstand industrial applications this premium enclosure comes complete with mounting pan & mounting feet.

Features

- IP55
- Grey RAL7035 epoxy UV resistant polyester powder coat
- 1.5mm body/1.5mm door
- 120 degree door opening
- 8mm zinc square drive spanner lock
- Zinc plated mounting feet (x4)
- Polyurethane gasket
- M6 Earth stud
- 2mm galvanised mounting pan

DOUBLE DOOR ENCLOSURES		Dimensions (mm)			No. of Locks	Useable Depth	Weight (kg)	Stock Code
Model No.	Height	Width	Depth					
EX-608030-GPDD	600	800	300	2	287	30.0	I	
EX-601430-GPDD	600	1400	300	2	287	56.0	I	
EX-601440-GPDD	600	1400	400	2	387	63.0	I	
EX-801020-GPDD	600	1000	200	2	187	44.0	I	
EX-801030-GPDD	800	1000	300	2	287	45.0	S	
EX-801220-GPDD	800	1200	200	2	187	43.0	I	
EX-801230-GPDD	800	1200	300	2	287	46.0	I	
EX-801240-GPDD	800	1200	400	2	387	61.0	S	
EX-801440-GPDD	800	1400	400	2	387	66.0	I	
EX-801640-GPDD	800	1600	400	2	387	69.0	I	
EX-801840-GPDD	800	1800	400	2	387	72.0	I	
EX-802040-GPDD	800	2000	400	2	387	75.0	I	
EX-101030-GPDD	1000	1000	300	2	287	51.0	I	
EX-101230-GPDD	1000	1200	300	2	287	56.0	S	
EX-101640-GPDD	1000	1600	400	2	387	62.0	I	
EX-101840-GPDD	1000	1800	400	2	387	67.0	I	
EX-102040-GPDD	1000	2000	400	2	387	73.0	I	
EX-121030-GPDD	1200	1000	300	2	287	56.0	I	
EX-121230-GPDD	1200	1200	300	2	287	61.0	I	
EX-121240-GPDD	1200	1200	400	2	387	65.0	I	


Available in powdercoat orange RAL2000 on request



Technical Specifications

MILD STEEL DIMENSIONS AND TECHNICAL DRAWINGS

EX-GPDD Series

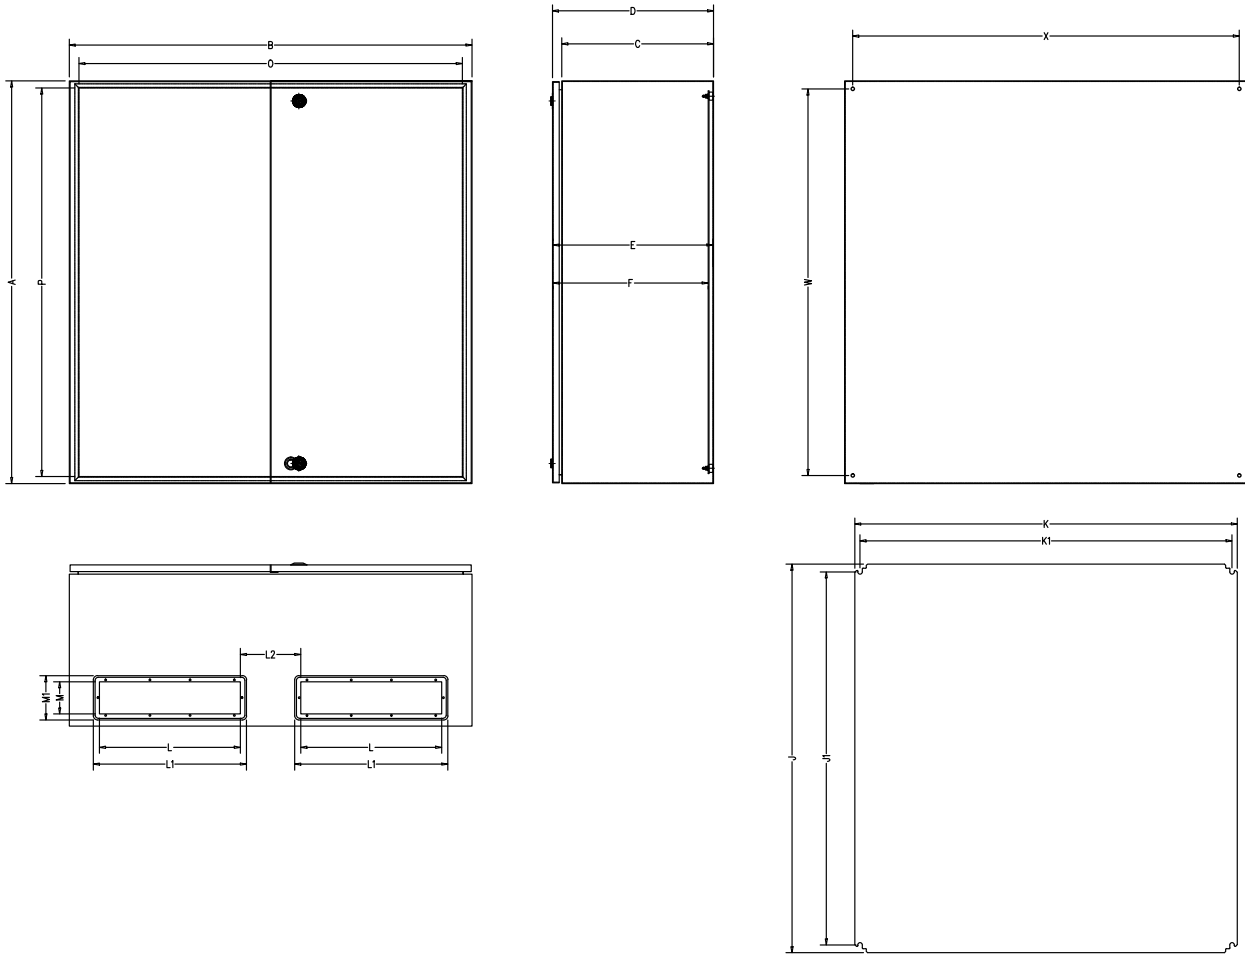

Part No.	External Dimensions				Internal Dimensions		Mounting Pan				Gland Plate					No. of Gland Plates	Opening Size		Fixing Centres		No. of Locks
	A	B	C	D	E	F	J	K	J1	K1	L	M	L1	M1	L2		O	P	W	X	
EX-608030-GPDD	600	800	302	278	299	287	549	749	525	725	550	80	580	110	NA	1	565	752	560	760	2
EX-601430-GPDD	600	1400	302	278	299	287	549	1349	525	1325	550	80	580	110	150	2	565	1352	560	1360	2
EX-601440-GPDD	600	1400	402	378	399	387	549	1349	525	1325	550	80	580	110	150	2	565	1352	560	1360	2
EX-801020-GPDD	800	1000	202	178	199	187	749	949	725	925	350	80	380	110	150	2	765	952	760	960	2
EX-801030-GPDD	800	1000	302	278	299	287	749	949	725	925	350	80	380	110	150	2	765	952	760	960	2
EX-801220-GPDD	800	1200	202	178	199	187	749	1149	725	1125	350	80	380	110	250	2	765	1152	760	1160	2
EX-801230-GPDD	800	1200	302	278	299	287	749	1149	725	1125	350	80	380	110	250	2	765	1152	760	1160	2
EX-801240-GPDD	800	1200	402	378	399	387	749	1149	725	1125	350	80	380	110	250	2	765	1152	760	1160	2
EX-801440-GPDD	800	1400	402	378	399	387	749	1349	725	1325	550	80	580	110	150	2	765	1352	760	1360	2
EX-801640-GPDD	800	1600	402	378	399	387	749	1549	725	1525	550	80	580	110	250	2	765	1552	760	1560	2
EX-801840-GPDD	800	1800	402	378	399	387	749	1749	725	1725	350	80	380	110	250	3	765	1752	760	1760	2
EX-802040-GPDD	800	2000	402	378	399	387	749	1949	725	1925	550	80	580	110	116.7	3	765	1952	760	1960	2
EX-101030-GPDD	1000	1000	302	278	299	287	949	949	925	925	350	80	380	110	150	2	965	952	960	960	2
EX-101230-GPDD	1000	1200	302	278	299	287	949	1149	925	1125	350	80	380	110	250	2	965	1152	960	1160	2
EX-101640-GPDD	1000	1600	402	378	399	387	949	1549	925	1525	550	80	580	110	250	2	965	1552	960	1560	2
EX-101840-GPDD	1000	1800	402	378	399	387	949	1749	925	1725	350	80	380	110	250	3	965	1752	960	1760	2
EX-102040-GPDD	1000	2000	402	378	399	387	949	1949	925	1925	550	80	580	110	116.7	3	965	1952	960	1960	2
EX-121030-GPDD	1200	1000	302	278	299	287	1149	949	1125	925	350	80	380	110	150	2	1165	952	1160	960	2
EX-121230-GPDD	1200	1200	302	278	299	287	1149	1149	1125	1125	350	80	380	110	250	2	1165	1152	1160	1160	2
EX-121240-GPDD	1200	1200	402	378	399	387	1149	1149	1125	1125	350	80	380	110	250	2	1165	1152	1160	1160	2