Mild Steel Enclosures

EX-TB SERIES MILD STEEL GENERAL PURPOSE TERMINAL BOX

Terminal Box

The TB series is ideal for the termination of marshalling cables, housing terminations & where smaller stainless steel enclosures are required.

Features

- IP66
- Grey RAL7035 epoxy UV resistant polyester powder coat
- 1.5mm construction
- Captive screws (lid)
- Zinc plated mounting feet (x4)
- Polyurethane gasket
- M6 earth stud
- 2mm galvanised mounting pan

TERMINAL BOXES	Dimensions (mm)			Useable Depth	Weight (kg)	Stock Code
Model No.	Height	Width	Depth			
EX-TB15158	150	150	80	65.6	1.1	S
EX-TB151512	150	150	120	105.6	1.3	S
EX-TB202080	200	200	80	65.6	2.3	S
EX-TB202012	200	200	120	105.6	3.0	S
EX-TB302012	300	200	120	105.6	3.3	S
EX-TB303012	300	300	120	105.6	3.5	S
EX-TB402012	400	200	120	105.6	3.7	S
EX-TB403012	400	300	120	105.6	4.0	S
EX-TB503012	500	300	120	105.6	5.8	I
EX-TB604012	600	400	120	105.6	6.5	I

Available in powdercoat orange RAL2000 on request

Technical Specifications

MILD STEEL DIMENSIONS AND TECHNICAL DRAWINGS

EX-TB Series

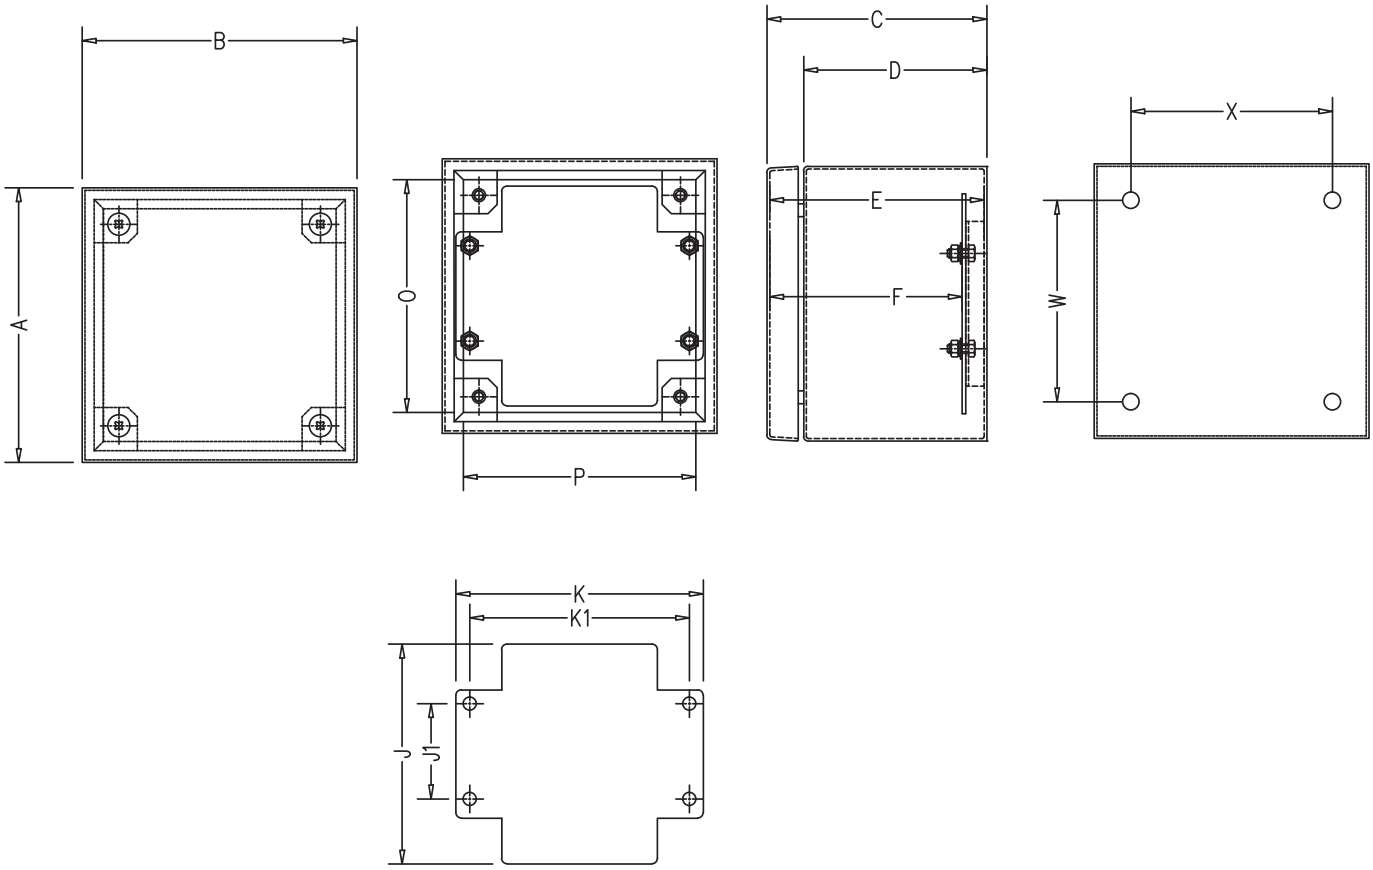

Part No.	External Dimensions				Internal Dimensions		Mounting Pan				Opening Size		Fixing Centres	
	A	B	C	D	E	F	J	K	J1	K1	O	P	W	X
EX-TB15158	150	150	80	60	77.6	65.6	120	135	52	120	127	127	130	130
EX-TB151512	150	150	120	100	117.6	105.6	120	135	52	115	127	127	130	130
EX-TB20208	200	200	80	60	77.6	65.6	170	185	104	165	177	177	180	180
EX-TB202012	200	200	120	100	117.6	105.6	170	185	104	165	177	177	180	180
EX-TB302012	300	200	120	100	117.6	105.6	270	185	104	165	277	177	280	180
EX-TB303012	300	300	120	100	117.6	105.6	270	285	195	265	277	277	280	280
EX-TB402012	400	200	120	100	117.6	105.6	370	185	104	165	377	177	380	180
EX-TB403012	400	300	120	100	117.6	105.6	370	285	195	265	377	277	380	280
EX-TB503012	500	300	120	100	117.6	105.6	470	285	195	265	477	277	480	280
EX-TB604012	600	400	120	100	117.6	105.6	570	385	299	365	577	377	580	380