



# Stainless Steel Enclosures

EX-FME/S SERIES FLANGE MOUNT

## Flange Mount Enclosures




The flange mount FME offers a robust, fully welded mounting system for easy installation. Typically suited to mining and industrial applications.

### Features

- IP66
- 316 stainless steel
- Body construction 1.5mm
- Internal C rails
- Flange mounted
- Concealed stainless steel hinges
- Fully welded construction
- Polyurethane gasket
- 8mm stainless steel square drive spanner lock
- Mounting pan 2mm powder coated white mild steel
- Earth strap kit
- Escutcheon kit adaptable - refer kit - EX-IDK (Page 21)


FLANGE MOUNT ENCLOSURES		Dimensions (mm)			No. of Locks	Useable Depth	Weight (kg)	Stock Code
Model No.	Height	Width	Depth					
EX-FME3020125/S	300	200	125	1	107	4.8	S	
EX-FME404020/S	400	400	200	1	182	11.2	S	
EX-FME504020/S	500	400	200	1	182	13.3	S	
EX-FME604020/S	600	400	200	2	182	15.6	S	
EX-FME606028/S	600	600	280	2	262	24.0	S	
EX-FME806028/S	800	600	280	2	262	31.2	S	



# Technical Specifications

STAINLESS STEEL DIMENSIONS AND TECHNICAL DRAWINGS

## EX-FME/S Series

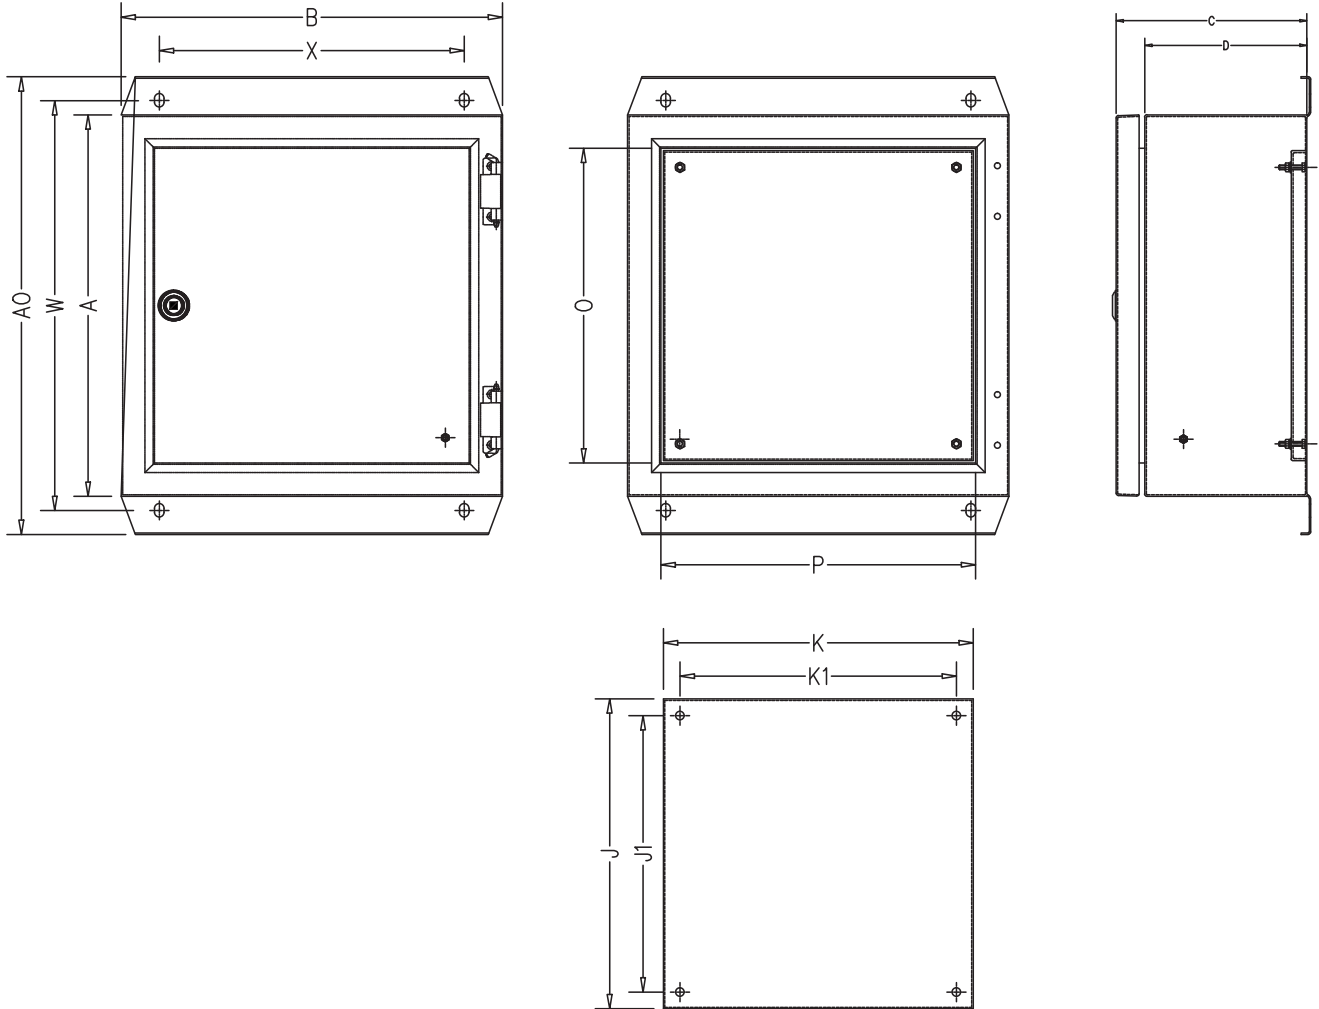

Part No.	External Dimensions				Internal Dimensions		Mounting Pan				Opening Size		Fixing Centres		No. of Locks	
	A	B	C	D	AO	E	F	J	K	J1	K1	O	P	W		X
EX-FME3020125/S	300	200	125	95	380	122	107	225	125	190	90	230	130	330	120	1
EX-FME404020/S	400	400	200	170	480	197	182	325	325	290	290	330	330	430	320	1
EX-FME504020/S	500	400	200	170	580	197	182	425	325	390	290	430	330	530	320	1
EX-FME604020/S	600	400	200	170	680	197	182	525	325	490	290	530	330	630	320	2
EX-FME606028/S	600	600	280	250	680	277	262	525	525	490	490	530	530	630	520	2
EX-FME806028/S	800	600	280	250	880	277	262	725	525	690	490	730	530	830	520	2