



Non Metallic Enclosures

HINGE TYPE ENCLOSURE EX-MG & MT SERIES LATCH & HINGE TYPE ABS/PC

Hinged Enclosure



The EX-MG (grey body/grey door) and the EX-MT (grey body/clear door) range is constructed of Acrylonitrile Butadiene Styrene (ABS) and Polycarbonate (PC-clear door version). This cost effective, lightweight enclosure is corrosion resistant and has excellent insulation properties designed to house terminations and electrical components. This hinge lid version is ideal for applications that require frequent access for maintenance.


Features

- IP66
- ABS/PC construction
- Grey and clear door options
- Hinged door (latch and hinge type)
- IK08 impact resistant
- -40 degrees to 120 degrees celsius
- ANSI/IEC 60529-2004

GREY DOOR OPTIONS		Dimensions (mm)			Weight (kg)	Stock Code
Model No.	Height	Width	Depth			
EX-MG-2030	300	200	180	1.5	I	
EX-MG-3030	300	300	180	1.9	I	
EX-MG-3040	400	300	180	2.3	I	
EX-MG-4030	300	400	180	2.3	I	
EX-MG-4050	500	400	200	2.9	I	
EX-MG-4060	600	400	200	3.5	I	

CLEAR DOOR OPTIONS		Dimensions (mm)			Weight (kg)	Stock Code
Model No.	Height	Width	Depth			
EX-MT-2030	300	200	180	1.5	I	
EX-MT-3030	300	300	180	1.9	I	
EX-MT-3040	400	300	180	2.3	I	
EX-MT-4030	300	400	180	2.3	I	
EX-MT-4050	500	400	200	2.9	I	
EX-MT-4060	600	400	200	3.5	I	


MOUNTING PANS TO SUIT EX-MG & MT SERIES		
Model No.	Metal Mounting Plate to Suit MG + MT Enclosures	Stock Code
EX2030	Metal Mounting Plate for MG + MT 2030 Enclosures	I
EX3030	Metal Mounting Plate for MG + MT 3030 Enclosures	I
EX3040	Metal Mounting Plate for MG + MT 3040 Enclosures	I
EX4030	Metal Mounting Plate for MG + MT 4030 Enclosures	I
EX4050	Metal Mounting Plate for MG + MT 4050 Enclosures	I
EX4060	Metal Mounting Plate for MG + MT 4060 Enclosures	I



Technical Specifications

NON METALLIC DIMENSIONS AND TECHNICAL DRAWINGS

EX-MG Series and EX-MT Series

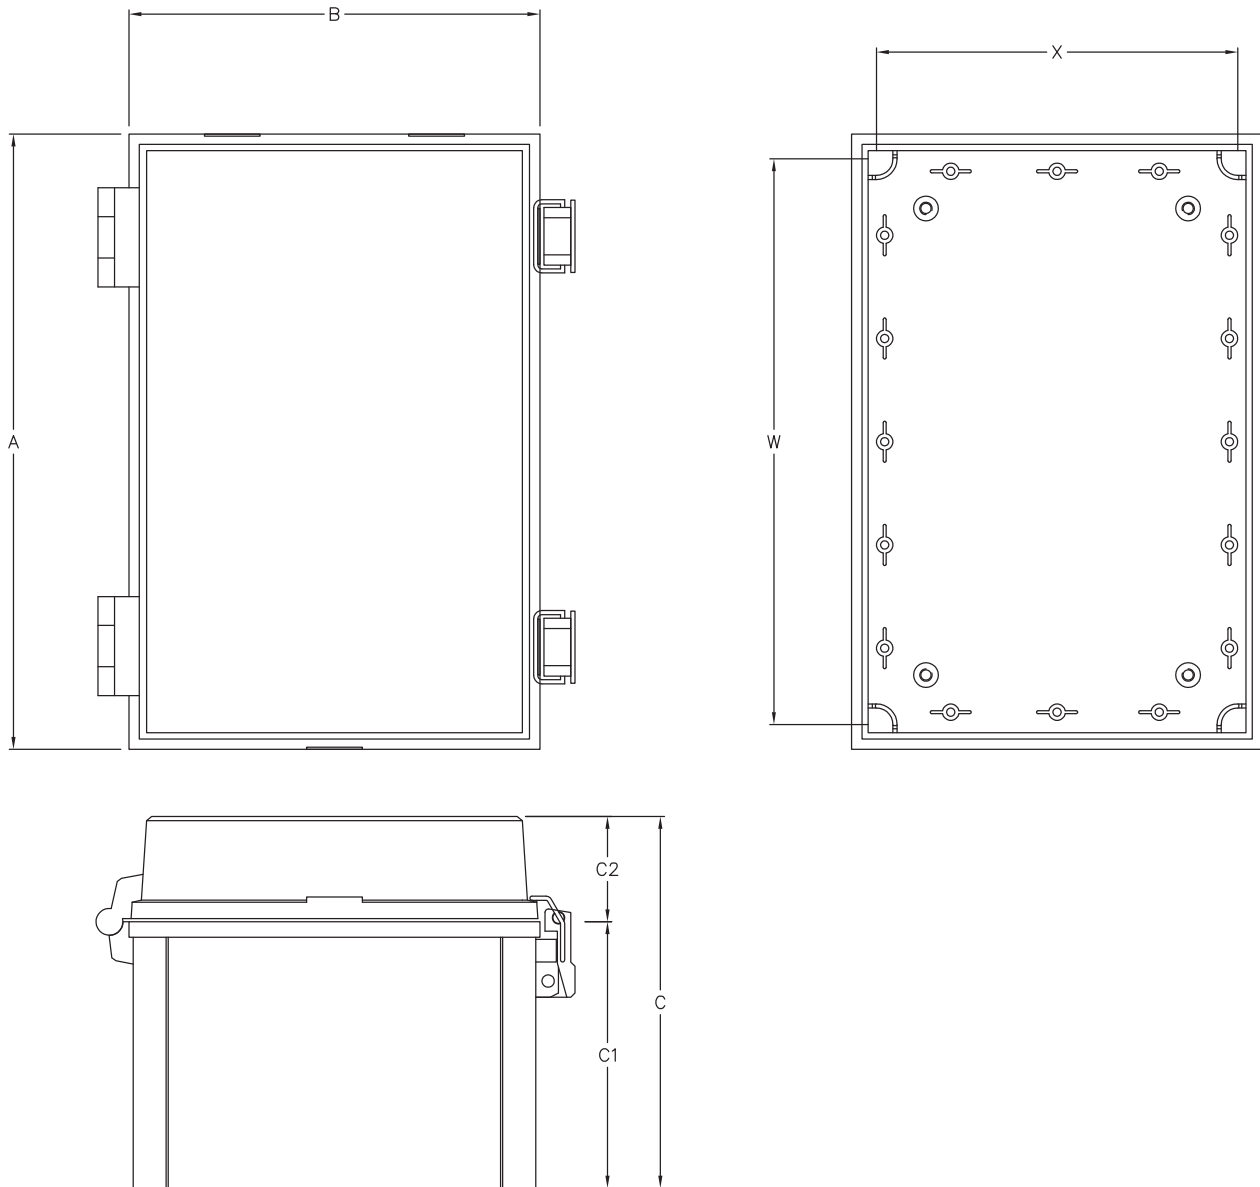

Part No.		External Dimensions					Fixing Centres	
Grey Door	Clear Door	A	B	C	C1	C2	W	X
EX-MG-2030	EX-MT-2030	200	300	180	130	50	171	271
EX-MG-3030	EX-MT-3030	300	300	180	130	50	269	269
EX-MG-3040	EX-MT-3040	300	400	180	130	50	270	370
EX-MG-4030	EX-MT-4030	400	300	180	130	50	370	270
EX-MG-4050	EX-MT-4050	400	500	200	150	50	371	471
EX-MG-4060	EX-MT-4060	400	600	200	170	30	370	570